

Magna Chemical VCI Powder
Distributed by: Kpr Adcor Inc
'We Stop Rust! TM
USA & Canada Toll Free 1-866-577-2326
Tel.905-628-3232 Fax.1-866-908-6992

Corrosion Control Metal Protection

PRODUCT INFORMATION VAPPRO 848

Multi-Metal VCI POWDER

NATO STOCK NUMBER: 6850-32-076-1099 MIL I-22110C

DESCRIPTION

Vappro 848 is a unique formulation Vapour Corrosion Inhibitor Powder for dry corrosion protection of metals in recessed areas, interior cavities and voids. Vappro 848 has found considerable application as a corrosion inhibitor in low concentrations and is effective in protecting multi-metals from corrosion. It does not contain chromates or nitrites. It is easy to apply and remove by air gun or water.





FEATURES

- Nitrites-free and does not contain Chromates
- * Easy to apply
- ★ Multi-metal protection
- Provides mono-molecular inhibiting layer
- * Non-toxic

ADDITIONAL BENEFITS

- * Long term protection
- Protected products can be shipped to customers without removing powder
- Easy removal: powder can be removed by air gun or water when applied as a powder
- * Little or no surface preparation required

The details of our products are given completely free of undertaking. Since their application lies outside our control, we cannot accept any liability for the results. Users shall determine the suitability of the product for its intended use, and user assumes all risk and liabilities whatsoever in connection therewith.

AREA OF USE

- * Vappro 848 powder is used for dry protection of internal cavities and voids that can be covered or closed after application.
- * For protection of tubular structures, pipes, heat exchangers, tanks, vessels etc.
- * For protection of equipment after hydrostatic testing.
- * For protection of closed circuit cooling systems- dry lay-up.
- * For protection of parts, components and completed assemblies during storage and shipping.

METHOD OF APPLICATION


- * Apply powder by dusting, fogging or sprinkling. After application, cover, seal or close the interior cavity or void.
- ★ Fogging can be achieved by using an air-compressor.
- * When dissolved in water, it can be used as a liquid phase inhibitor.

PHYSICAL PROPERTIES	
Form	Powder
Appearance	White Powder
Melting Point	170 ⁰ C
Alkalinity (as NaOH)	Not more than 0.04% as NaOH
Water	Not more than 1.5%

Mild Steel, Wrought Iron Copper Cast Iron, Flake or Ductile Aluminum Alloys Zinc Magnesium Alloys Brass (30% Zn) Cadmium Silver Copper-Nickel Alloys Stainless Steel Solder Galvanized Steel Aluminized Steel





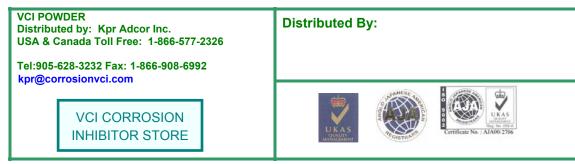

The details of our products are given completely free of undertaking. Since their application lies outside our control, we cannot accept any liability for the results. Users shall determine the suitability of the product for its intended use, and user assumes all risk and liabilities whatsoever in connection therewith.